


Manual Switch 100A

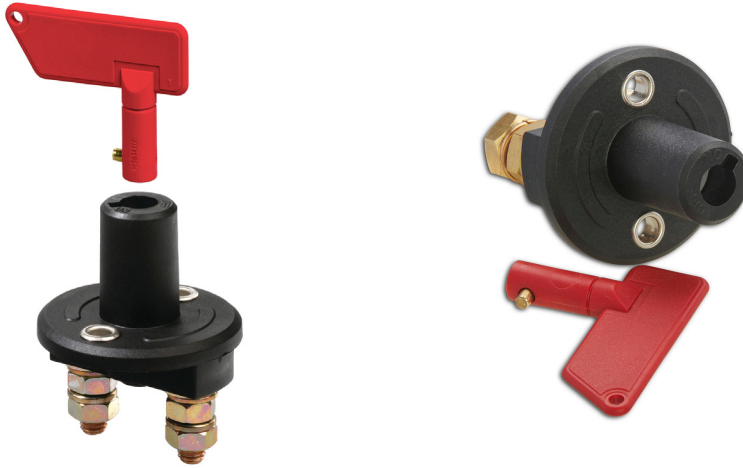

Description

Standard compact manual battery disconnect switch that features a removable handle with a plastic body. In two versions; 100A with M8 connections and upgraded 150A with M10 connections.

Features and Benefits

- Ingress protection to IP43 (IP4X).
- Removable red handle.
- Protection rubber cap possible as an accessory.

Specifications

Max Operating Voltage	24VDC
Max Continuous Current Inrush Rating (5 sec)	100A version 500A
Terminal Stud Size	M8 (Brass nuts)
Max Continuous Current Inrush Rating (5 sec)	150A version 1000A
Terminal Stud Size	M10 (Zinc plated Steel nuts)
Temperature Range	-40° to 85°C
Ingress Protection	IP4X / IP43

Dimensions mm

