



# P231

## Rugged 3U Power Supply Board

---

---



- 3U Form Factor
- Suitable for VME, CompactPCI, and VPX Systems
- 100 Watts Total Rated Power
- 75% Typical Efficiency
- 10 - 32Vdc Input Range
- Outputs: 5V/13 A, 3.3V/10 A, 12V/5.5 A, -12V/1 A
- EMI/RFI Input Filter
- Input Transient Protection
- Input Reverse Polarity Protection
- Output Over/Undervoltage and Short-Circuit Protections
- ACFAIL#, SYSFAIL#, SYSRST# Control Signals
- 4 ms Holdup Time
- Extended (50 ms) Holdup Time With Optional Capacitor Bank
- Input/Output and Chassis Isolation
- Thermal Shutdown
- External ON/OFF Control
- Internal BIT Status

---

**Aitech Defense Systems, Inc.**

A member of the Aitech Rugged Group

19756 Prairie Street, Chatsworth, CA 91311

Tel: (888) Aitech-8 (248-3248) Fax: (818) 407-1502 e-mail: [sales@rugged.com](mailto:sales@rugged.com) web: [www.rugged.com](http://www.rugged.com)

## Overview

Designed for harsh environment applications, the Aitech P231 is a versatile and reliable modular 3U power supply. Its wide input voltage range assures excellent load and line regulation.


An integral input line filter is used to reduce the input reflected ripple.

The P231 has a total power output capacity of up to 100 W, providing four standard output voltages (5, 3.3, 12, -12 Vdc), making it ideal for use in VME, CompactPCI, and VPX systems. Input to output isolation is of 500 V minimum, thus eliminating any possibility of ground loops.

All outputs are individually protected against short circuit and overvoltage. The power supply asserts the three control signals: ACFAIL#, SYSFAIL#, and SYSRST#. The 5 Vdc and 12 Vdc outputs have sense lines to ensure voltage stability for high current loads.

A discrete input enables the power supply to be turned on and off remotely.

Indicator LEDs provide a convenient visual indication of output voltage status.

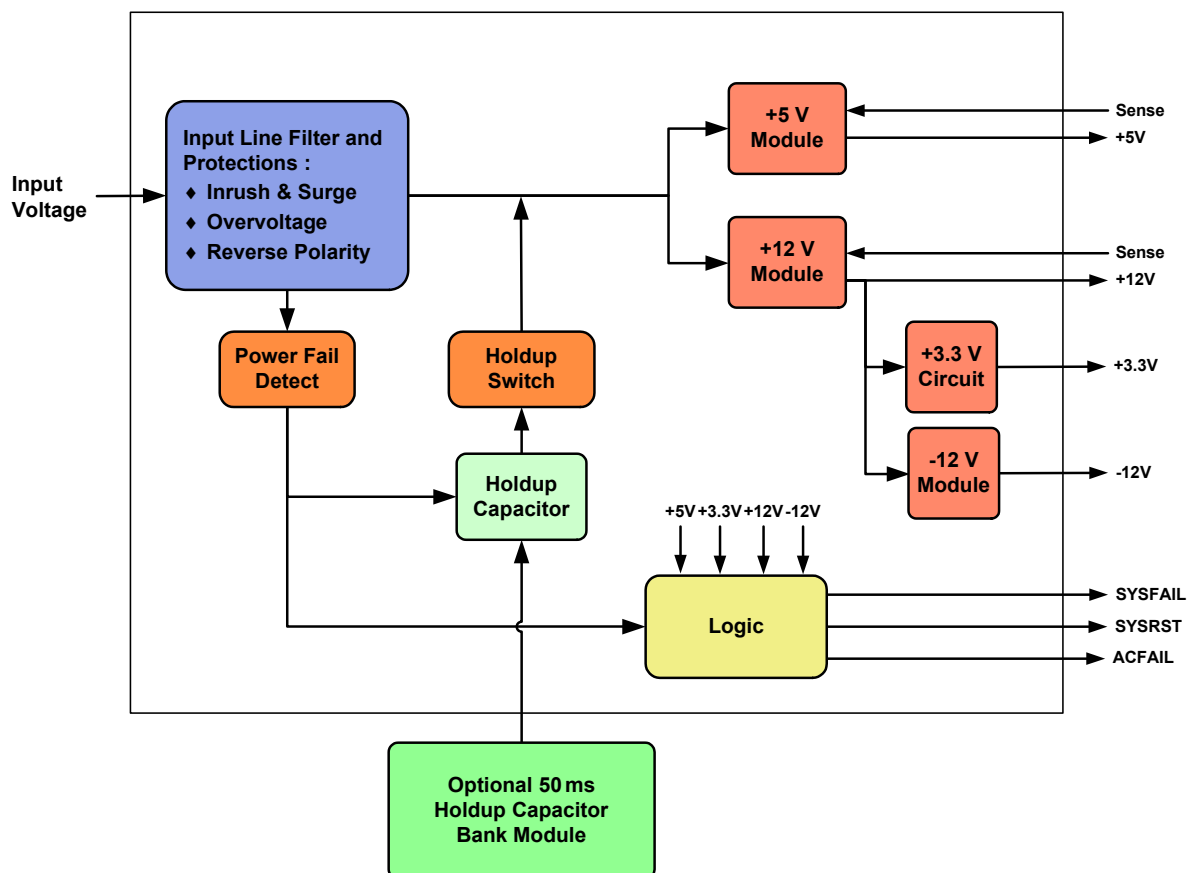

**P231 Power Supply Block Diagram**



## Functional Description

### Input Voltage Operation and Protection

The P231 power supply operates over a continuous DC input voltage range of 10 to 32Vdc.

Input power protection circuitry protects the power supply from reverse input voltage up to 50Vdc, and excessive inrush current.

The power supply provides operation with input power compliant to MIL-STD-1275 and MIL-STD-704 (see Electrical Specifications – Input section).

### Output Voltage Operation and Protection

Four isolated outputs (+5, +3.3, +12, and –12Vdc) with a total power rating of up to 100W, are provided by a combination of DC-to-DC converter modules and discrete power conversion circuitry. These output voltages make the P231 suitable for use in many VME, CompactPCI, and VPX systems.

The DC-to-DC converters feature higher than 500V input-to-output isolation, eliminating any possibility of ground loops. Furthermore the 5 and 12Vdc DC-to-DC converters are equipped with internal thermal shutdown to protect them from damage due to overheating. As the 3.3 and –12Vdc outputs are derived from the 12Vdc, they are similarly protected.

The P231 implements independent current limiting for each output voltage.

Outputs are protected against short circuit, overcurrent, and overvoltage.

The 5 and 12Vdc output voltages are equipped with sense lines that are routed to the power connector.

### Hold-up Circuit

The P231 uses a holdup circuit that issues an ACFAIL# signal, and enables the board to maintain all outputs within specification limits for 4 ms after input voltage drops below 11Vdc. This allows the system to take all necessary emergency actions before shutting down.

Extended holdup time is available through the P231 optional capacitor bank. The capacitor bank module provides high capacitive capabilities and directly connects to the P231 holdup circuit, extending the overall holdup time to 50 ms at maximum load.

### External Remote ON/OFF

A discrete GND/OPEN input enables external power ON/OFF control of the P231.

### Status LEDs

The power supply is equipped with an internal BIT mechanism that monitors the outputs at all times.

Four green LEDs indicate that the four output voltages are within the VME specification limits.

### Power Monitor Circuit

The P231 incorporates input and output voltage monitoring circuitry, asserting the ACFAIL#, SYSFAIL#, and SYSRST# signals.

ACFAIL# is asserted in the event of an input power loss or failure of the 5 or 3.3Vdc outputs. This also triggers the holdup circuit.

SYSFAIL# is asserted during any power-on event until the P231 reaches a fully operational mode. During normal operation SYSFAIL# is asserted to indicate a power supply (output) failure.

SYSRST# is asserted for at least 250 ms at any power-on event.

### Mechanical and Thermal Construction

Height and depth of the P231 conform with standard conduction cooled 3U dimensions; it will fit into standard IEEE1101.2 card rails. Due to size of power components and the thickness of the heatsink, the P231 exceeds standard 3U width and will therefore require more than a single slot pitch. The conduction-cooled board is packaged in and protected by an aluminum housing for mechanical ruggedization, EMI/RFI shielding, and thermal conduction of the heat to the enclosure. It is equipped with wedgelocks to hold it in place and clamp it to the enclosure rails for heat transfer, and extractors for easy removal.

Thermal interface surfaces are chemical conversion coated for maximum heat transfer and corrosion resistance.



### EMI/RFI Design

The power supply is equipped with an on-board input power EMI/RFI line filter to ensure compliance with the transient suppression requirements of MIL-STD-704.

All high power and noisy components are shielded by a monolithic heatsink that is connected to the enclosure chassis through the electrically conductive thermal interface.



## Mechanical Specifications

### Dimensions and Weight

	No capacitor bank	With capacitor bank
Height [mm]	100	100
Depth [mm]	168	168
Width [mm]	29	40
Weight [g]	<750	<900

## Electrical Specifications

### Input

Normal Steady State Operation [Vdc]	10 - 32
Turn-on [Vdc]	11
Overvoltage Protection [Vdc]	Up to 36
Reverse Polarity Protection [Vdc]	Up to 50
General Characteristics and transient suppression	<p><u>MIL-STD-1275AT</u> Operation under normal conditions. No damage during cranking mode and surges above 50V.</p> <p><u>MIL-STD-704D &amp; E</u> Operation under all conditions</p> <p><u>MIL-STD-704A</u> Operation under normal conditions. No damage during surges above 50V</p>

### Outputs

- 100 W Total Rated Power

Output [Vdc]	Max Current [A]	Max Power [W]	
5	13	75	100 (combined)
3.3	10	75 (combined)	
12	5.5		
-12	1		

Parameter	5 Vdc	3.3 Vdc	12 Vdc	-12 Vdc
Voltage (Vdc) Min	+4.875	+3.2	+11.64	-11.64
Voltage (Vdc) Max	+5.25	+3.45	+12.6	-12.6
Current Limit (A)	15	11	6	2
Ripple/Noise (mV <sub>P-P</sub> )	<50	<50	<50	<50
Short circuit protection	✓	✓	✓	✓

### Efficiency

- 75% Typical

### Thermal Shutdown

- 125 °C with an hysteresis of 10 °C

### Isolation Resistance

- >10 MΩ at 120 V input to chassis
- >10 MΩ at 100 V output to chassis
- >10 MΩ at 500 V input to output

### ACFAIL# and SYSRST#

#### Input/Output Undervoltage Sensing

	Output [Vdc]	Input [Vdc]
<b>ACFAIL# State</b>	3.3	5
<b>Decreasing Voltage</b>	2.9	4.5
<b>Increasing Voltage</b>	3.18	4.85

### SYSFAIL#

#### Output Undervoltage Sensing

SYSFAIL# State	+12V	-12V
<b>Decreasing Voltage [Vdc]</b>	11	-11.6
<b>Increasing Voltage [Vdc]</b>	11.64	-11

#### Output Overvoltage Sensing and Indication

SYSFAIL# State	5V	3.3V	12V	-12V
<b>Decreasing Voltage [Vdc]</b>	5.35	3.46	12.65	-13.7
<b>Increasing Voltage [Vdc]</b>	5.9	3.75	13.7	-12.65

## Environmental

The P231 is available in two levels of ruggedization that differ mainly in operating temperature, and resistance to shock, vibration, and humidity.

Refer to the Aitech Ruggedization Levels datasheet for more information on selecting the ruggedization level that meets your specific needs.


### EMC Protection (MIL-STD-461D, Part IV)<sup>2</sup>

- CS101 (20 Hz - 50 kHz)
- CE102 (10 kHz - 10 MHz)
- CS114 (10 kHz - 400 MHz)
- RE102 (10 kHz - 10 GHz)



# P231 Rugged 3U Power Supply Board

## Ordering Information for the P231

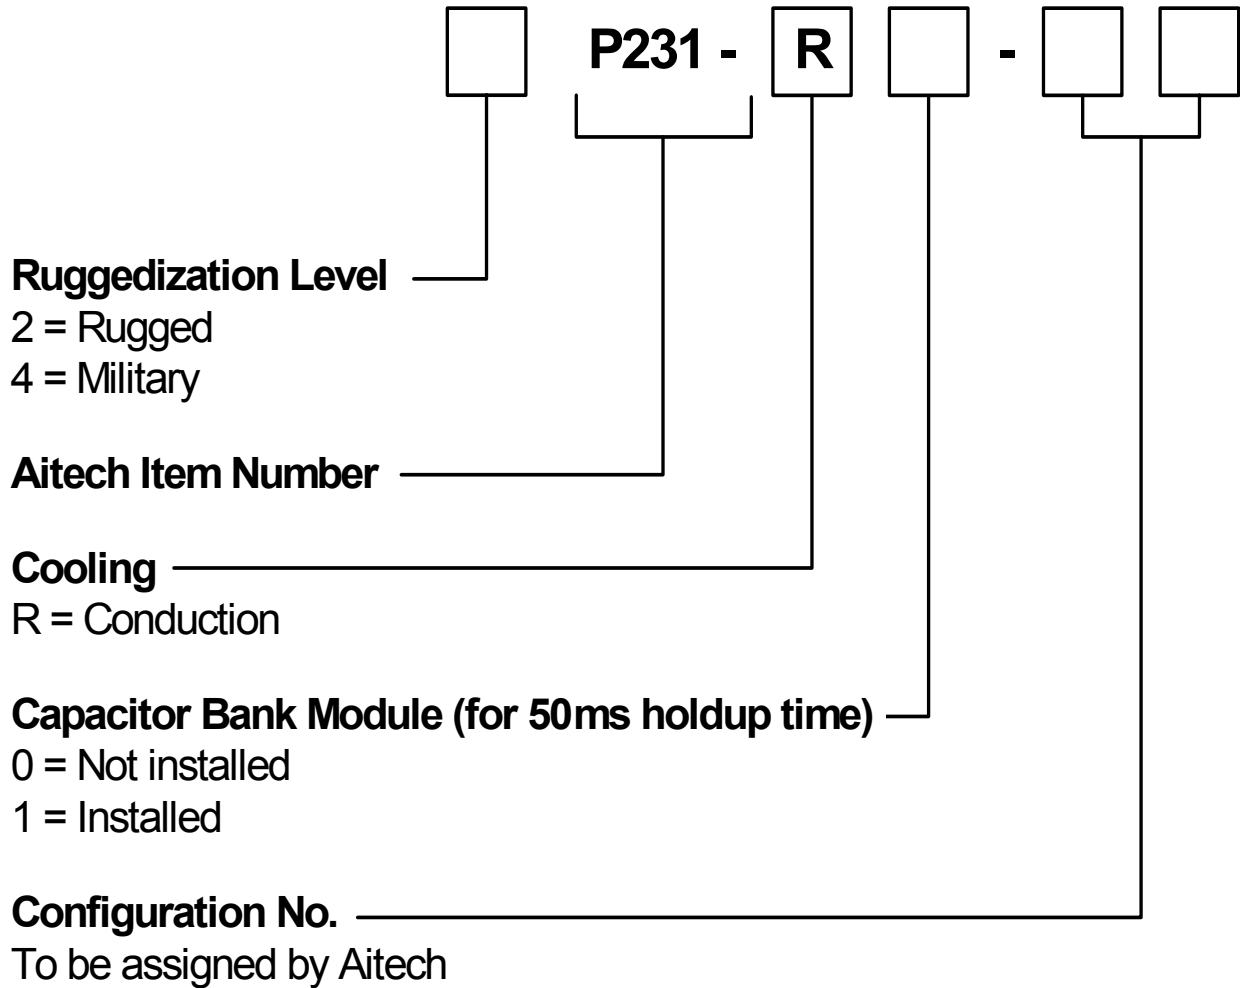

**Example:** 2P231-R0-00

For more information about the P231 or any Aitech product, please contact Aitech Defense Systems sales department at (888) Aitech-8 (248-3248).