



BIO-ST01-L1U2

2.5" BIO Daughter Board with Gigabit LAN and USB

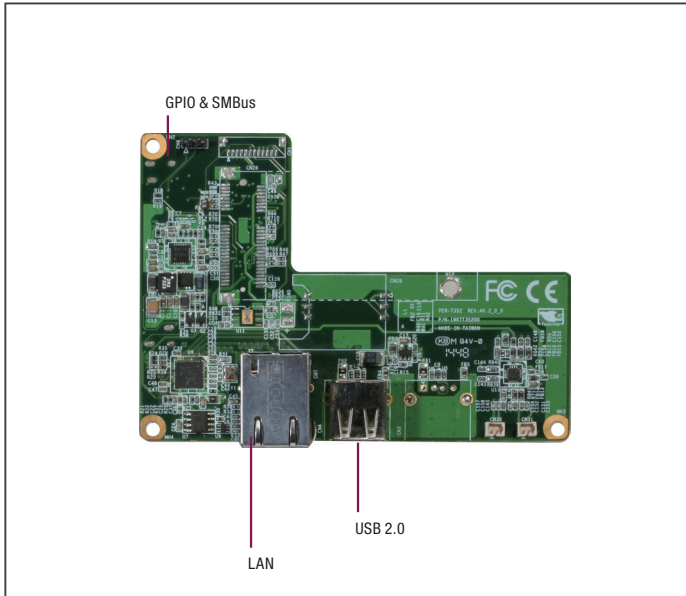

Features

- Gigabit Ethernet x 1, RJ-45 x 1
- USB 2.0 x 2
- Speaker Out with 2W Amp
- SMBus x 1
- LPC (Optional)



Specifications

System	
Form Factor	2.5" Board
BIO	80-Pin high speed board to board connector
Power Requirement	Power Supplied from MB via board to board connector
Dimension	3.94" x 2.84" (100mm x 72mm)
Gross Weight	0.44 lb (0.2 kg)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40 °F ~ 176°F (-40°C ~ 80°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
Certification	—
I/O	
Ethernet	Realtek 8111E, 10/100/1000Base-TX, RJ-45 x 1
USB	USB 2.0 x 2 on rear I/O
Audio	Speaker Out with 2W Amp
Expansion Interface	SMBus x 1
PCIe	—
Serial Port	—
SIM	—
DIO	—

Packing List

- Accessory Kit
- BIO-ST01-L1U2

Ordering Information

P/N	LAN	USB	Expansion Slot	Temp.
BIO-ST01-L1U2-A11-0001	GbE x 1	USB 2.0 x 1	Speaker Out with 2W Amp, SMBus*1	0°C ~ 60°C

Dimension

Unit: mm

