



POSITAL

FRABA

IXARC Absolute Rotary Encoder

UCD-AC1P5-PPPP-D10D-PRM



Interface

Interface	Programmable Analog Current (Preset + Dir)
Manual Functions	Preset + complement via cable or connector
Configuration Tool	UBIFAST Configuration Tool (Version \geq 1.6.10) + Ubifast Adap
Video Manual	▶ Watch a simple installation video
Programming Functions	Measurement Range, Preset Value, Output Direction, Code

Electrical Data

Supply Voltage	8 - 32 VDC
Current Consumption	Typical 20 mA @24 V (no load)
Start-Up Time	<500 ms
Max Load Resistance	500 Ω
Analog Accuracy	@ 20 mA = \pm 20 μ A (with an ideal power supply)
Linearity	0.15%
Settling Time	32 ms (from min value to max value jump)
Reverse Polarity Protection	Yes
Short Circuit Protection	Yes
EMC: Emitted Interference	DIN EN 61000-6-4
EMC: Noise Immunity	DIN EN 61000-6-2
MTTF	240.8 years @ 40 $^{\circ}$ C

Data Sheet

Printed at 19-09-2019 13:09



POSITAL

FRABA

Sensor

Technology	Magnetic
Multiturn Technology	Self powered magnetic pulse counter (no battery, no gear)
Accuracy (INL)	$\pm 0.0878^\circ$ (≤ 12 bit)
Sense Signal (Default)	Counterclockwise shaft movement (front view on shaft)
Code	Analog Current 4 - 20 mA
Cycle Time Base Sensor	$< 100 \mu\text{s}$
Minimum Measurement Range	0 - 22.5°
Resolution of Output	Max. 13 bits over entire measuring range (Fractional Turns - Resolution decreases less than 13 bits when measurements range is less than 90 degrees)
Multiturn Range	16 turn (default setting). User can use the UBIFAST Tool to measure up to 65536 turns.

Environmental Specifications

Protection Class (Shaft)	IP68/IP69K
Protection Class (Housing)	IP68/IP69K
Operating Temperature	-40 °C (-40 °F) - +85 °C (+185 °F)
Humidity	98% RH, no condensation

Mechanical Data

Housing Material	Steel
Housing Coating	Cathodic corrosion protection (>720 hrs salt spray resistance)
Flange Type	Synchro, \varnothing 36 mm Heavy Duty
Flange Material	Aluminum
Shaft Type	Solid, Length = 20 mm
Shaft Diameter	\varnothing 10 mm (0.39")
Shaft Material	Stainless Steel V4A (1.4112, 440 B), hardened
Max. Shaft Load	Axial 180 N, Radial 180 N
Minimum Mechanical Lifetime (10 ⁸ revolutions with Fa/Fr)	10 (180 N / 180 N), 15 (150 N, 150 N), 30 (100 N / 100 N)
Friction Torque	≤ 5 Ncm @ 20 °C, (7.1 oz-in @ 68 °F)
Max. Permissible Mechanical Speed	≤ 6000 1/min
Shock Resistance	≤ 200 g (half sine 11 ms, EN 60068-2-27)
Permanent Shock Resistance	≤ 30 g (half sine 16 ms, EN 60068-2-29)

Data Sheet

Printed at 19-09-2019 13:09



POSITAL

FRABA


Vibration Resistance	≤ 30 g (10 Hz - 1000 Hz, EN 60068-2-6)
Length	56 mm (2.20")
Weight	245 g (0.54 lb)

Electrical Connection

Connection Orientation	Radial
Connector	M12, Male, 5 pin, a coded

Product Life Cycle

Product Life Cycle	New
Approval	CE + cULus listed, Industrial Control Equipment

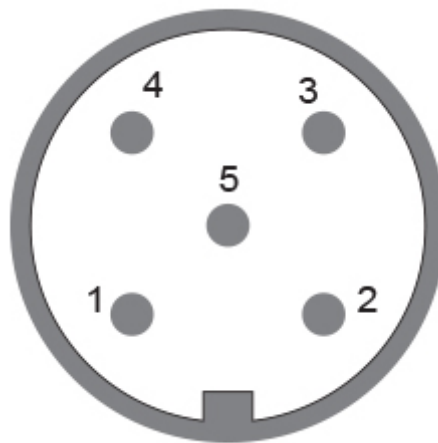

Connection Plan

SIGNAL	CONNECTOR	PIN NUMBER
Power Supply	Connector 1	2
GND	Connector 1	3
Analog Output	Connector 1	1
Set1/Direction	Connector 1	5
Set2/Zero Set	Connector 1	4

Connector-View on Encoder

Dimensional Drawing

[2D Drawing](#)

Accessories

Connectors & Cables

10m PUR Cable, 5pin, A-Coded, f

2m PUR Cable, 5pin, A-Coded, f

Data Sheet

Printed at 19-09-2019 13:09



POSITAL

FRABA

5m PUR Cable, 5pin, A-Coded, f
10m PUR Cable, 5pin, A-Coded, f
M12, 5pin A-Coded, Female

More

Couplings

Coupling Disc Type-10-12
Coupling Bellow Type-10-10
Coupling Bellow Type-06-10
Coupling Bellow Type-08-10
Coupling Bellow Type-10-12
Coupling Bellow Type-10-(1/4")
Coupling Bellow Type-10-(3/8")
Coupling Jaw Type-06-10
Coupling Jaw Type-08-10
Coupling Jaw Type-10-12
Coupling Jaw Type-10-(1/4")
Coupling Jaw Type-10-(3/8")
Coupling Jaw Type-10-10
Coupling Disc Type-06-10
Coupling Disc Type-10-10

More

Displays

AP22-D0 Analog Display (4 dig. o/p)
DiMod-A Analog Display
Configuration/Programming Tools
UBIFAST Configuration Tool
Ubifast Adapter Cable - UCD-Ax-PxM

Contact



Contact Us

The picture and drawing are for general presentation purposes only. Please refer to the "Download" section for detailed technical drawings. All dimension in [inch] mm. © FRABA B.V., All rights reserved. We do not assume responsibility for technical inaccuracies or omissions.

Data Sheet

Printed at 19-09-2019 13:09



POSITAL

FRABA

Specifications are subject to change without notice.