



BEACONS



EB7186 Series R65 Class II LED Beacons

The EB7186 LED provides the ultimate level of power, versatility and style available in an LED beacon. The latest high-intensity LEDs combine with reflector technology to produce a powerful, R65 Class II warning signal in a square housing that also offers premium features, including multiple flash patterns and synchronization capability. Featuring 12-24 VDC operation and 24 flash patterns, the EB7186 Series is suitable for a wide range of applications where a high-intensity R65 Class II light is required.


Models

| PART NO. | VOLTAGE | AMPS | LENS/ILLUMINATION | MOUNT |
|-----------|---------|------|-------------------|--------|
| EB7186AAA | 12-24 | 8.6 | Amber | 4 Bolt |
| EB7186BBB | 12-24 | 8.6 | Blue | 4 Bolt |
| EB7186CAA | 12-24 | 8.6 | Clear/Amber | 4 Bolt |
| EB7186CBB | 12-24 | 8.6 | Clear/Blue | 4 Bolt |

Features and Benefits

- 24 flash patterns, including simulated rotate mode and hi/lo intensity
- Multiple units can be synchronised
- Temperature Range: -30°C to +50°C

Dimensions

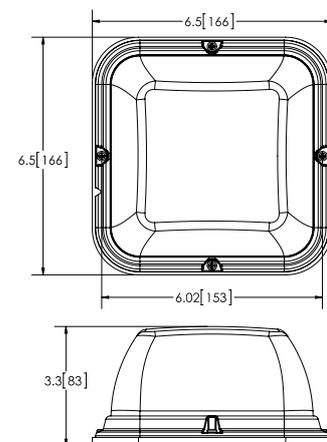

Flash Patterns (24)

- Single, 125 FPM: Bottom LEDs, Top LEDs, All LEDs
- Double, 125 FPM: Bottom LEDs, Top LEDs, All LEDs
- Quad, 135 FPM: Bottom LEDs, Top LEDs, All LEDs
- Rotate, 125 FPM: Bottom LEDs, Top LEDs, All LEDs
- Single, 75 FPM: Bottom LEDs, Top LEDs, All LEDs
- Double, 75 FPM: Bottom LEDs, Top LEDs, All LEDs
- Quad, 75 FPM: Bottom LEDs, Top LEDs, All LEDs
- Rotate, 75 FPM: Bottom LEDs, Top LEDs, All LEDs